


# XF2 INTEGRA



Fantic XF2 is your cross-country powerhouse. With 27'5" plus tires and Hubs with Boost technology, you can easily transfer power to the ground. The Sram 11V (42 teeth) drivetrain lets you climb anywhere, and the Rock Shock Recon Silver 120mm fork, allows you to attack the most technical downhills with confidence. The XF2 hard tail is the perfect choice to tackle any adventure.

Fantic XF2 è l' e-bike studiata per il trail, con pneumatici posteriori da 27,5" x 2.6 e sistema boost technology nei mozzi che crea un perfetto mix di potenza tra motore ed atleta che viene poi trasmessa in maniera ottimale al suolo. il cambio Sram 11v (42 denti) permette di arrampicarsi ovunque, la forcella rock shox recon silver 120 mm consente di affrontare discese tecniche e terreni impervi: un vero "mostro" elettrico del fuoristrada.

## TECH

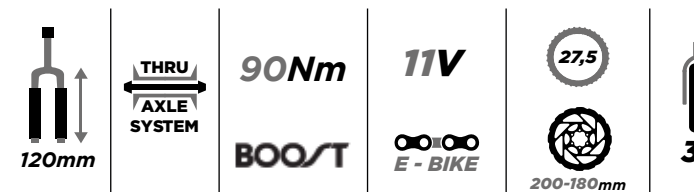

## TECHNICAL SPECIFICATIONS

<b>MOTOR/MOTORE</b>	Brose Drive-S 36 Volt, Max power: 250 Watt, Torque/Coppia: 90 Nm
<b>BATTERY/BATTERIA</b>	Fantic Integra, Lithium Ion, 36 Volt, 630Wh
<b>DISPLAY</b>	Brose-Marquardt multifunctional display & push-assistance selection unit
<b>FRAME/TELAIO</b>	Aluminium frame, CNC parts, Sizes: S - M - L
<b>FORK/FORCELLA</b>	Rock Shox Recon Silver, 120mm travel
<b>GROUPSET/CAMBIO</b>	Sram NX 11v
<b>CRANKSET/GUARNITURA</b>	Miche 32t
<b>CASSETTE/PIGNONI</b>	SRAM PG 1130 11-42
<b>CHAIN/CATENA</b>	KMC e-bike edition 11v
<b>FRONT BRAKE/FRENO ANT.</b>	Sram Level 2P, Hydraulic Disc Brake, 200mm disc
<b>REAR BRAKE/FRENO POST.</b>	Sram Level 2P, Hydraulic Disc Brake, 180mm disc
<b>TYRES/PNEUMATICI</b>	Schwalbe Smart-Sam, front 29"x 2.25" / Rear 27.5" x 2.6"
<b>RIMS/CERCHI</b>	Fantic
<b>FRONT HUB/MOZZO ANT.</b>	Sram 700 RS, 110 mm thru axle 15mm
<b>REAR HUB/MOZZO POST.</b>	Sram 700 RS, 148 mm thru axle 12mm
<b>HANDLEBAR/MANUBRIO</b>	Fantic 740mm
<b>STEM/ATTACCO MANUBRIO</b>	Fantic 60mm
<b>SEATPOST/TUBO SELLA</b>	Fantic 30,9mm
<b>SADDLE /SELLA</b>	Selle Royal Verve

	SIZE S	SIZE M	SIZE L	SIZE S	SIZE M	SIZE L	
<b>A1</b>	410	450	490	<b>R</b>	403	413	418
<b>B</b>	580	605	630	<b>R1</b>	177	192	212
<b>E</b>	468	468	468	<b>S</b>	615,5	627,5	653
<b>H</b>	312	312	312	<b>S1</b>	110	120	145
<b>H1</b>	52	52	52	<b>a</b>	74°	73°	72°
<b>L</b>	1151	1160	1168	<b>b</b>	68°	68,5°	69°